



SPECIAL CONTENTION

September 2025






















CATTLE CONTENTION




Animals can be handled smoothly in maximum safety; access to working areas can be provided with gates to simplify man passages.


With this range we wanted to respond as well as possible to our farmers' needs.



IN GENERAL, CATTLE ARRIVE
FROM THEIR HOLDING AREAS OR FROM EXTERNAL
UNLOADING AND ARE THEN LED SAFELY ALONG
A CATTLE CROWD GATE FOLLOWED BY A HALF-CORRAL.
THEY ARE THEN LED EITHER TOWARDS A LOADING
DOCK OR TO A CONTENTION HANDLING RACE
WHICH WILL BE EQUIPPED WITH A CATTLE CRUSH
FOR HEALTH CARE AND WEIGHING WITH THE POSSIBILITY
OF ADDING A SORTING GATE AT THE EXIT.

CONTENTION 1/2 CORRAL PANEL

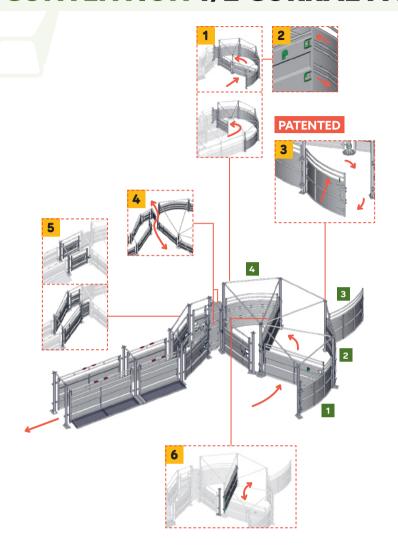

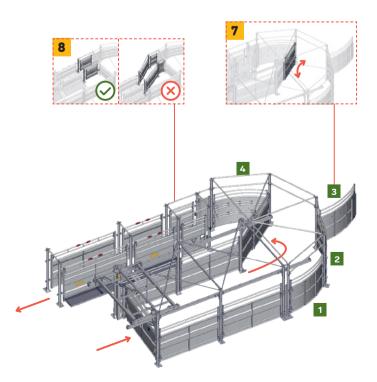

1 THE PREMIUM HANDLING 1/2 CORRAL can be installed alone

can be installed alone or with a push lane.

- 2 1/2 CORRAL with safety lock of the rotation barrier in clockwise or anti-clockwise operation.
- **3 1/2 CORRAL** with an opening portion by patented double autolock handle. **PATENTED**
- 4 OPENING METAL GATE for safe farmer passage.
- 1/2 CORRAL EXIT, allows selecting a Corral exit which is straight or curved.

6 DOUBLE LOOP OPTION FOR 1/2 CORRAL,

for a stop and allowing entry or exit by any portion of the 1/2 Corral.


7 DOUBLE LOOP OPTION FOR PUSH LANE,

for a stop and allowing entry or exit by portion No.3 or No.4 of the 1/2 Corral.

FOR A PUSH LANE,

to choose only a straight Corral exit.

CONTENTION EXIT, CORRIDOR AND 3-WAY DOOR

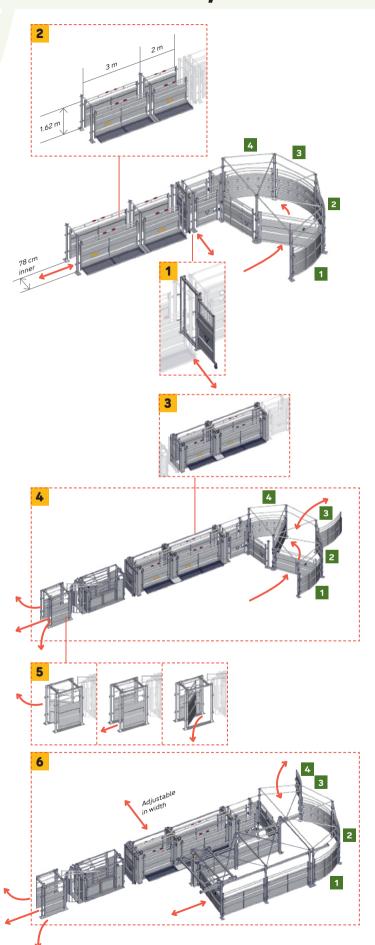


- 1 SECTIONAL DOOR allowing walkways to be closed safely.
- **FIXED HANDLING CORRIDOR** with fixed sheeted barriers (2 or 3 m) and folding rail. Optional footplate for access in height.
- 3 HANDLING ADJUSTABLE CORRIDOR IN WIDTH made of fixed sheeted barriers (2 or 3 m) with folding rails. Adjustable in width from 46 to 80 cm. Footplate on the work zone.
- COMPLETE PREMIUM
 CONTENTION with double loop
 and straight exit 1/2 Corral,
 adjustable corridor with cage
 and 3-way door.
- **3-WAY SORTING DOOR**with rope operated barriers
 to sort and direct the animals
 (left, right or forward).
 Barriers with springs to return
 to initial position.
- 6 COMPLETE PREMIUM
 CONTENTION with push lane,
 loop and straight exit 1/2 Corral,
 adjustable corridor with cage
 and 3-way door.


PREMIUM 1/2 anticlockwise Corral with round exit and fixed 5 m race.

A portion of the 1/2 Corral opens with a **double AUTOLOCK handle**. **PATENTED**

2 man passage sheeted gates enable the farmer to pass quickly through the restraint handling race.

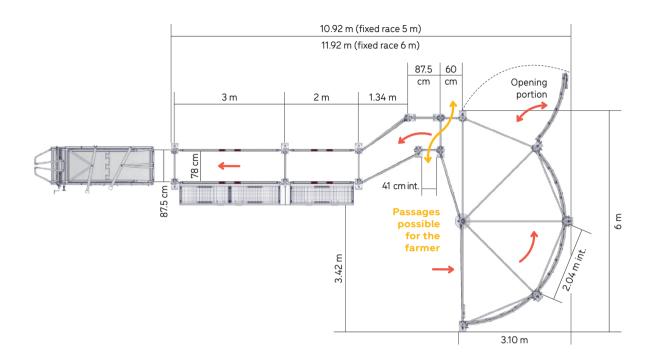

CO3010 1/2 PREMIUM Corral handling	993.4 kg
CO3012 Chicane / Round exit for PREMIUM Corral handling	349.4 kg
CO3160 Fixed race on platform L. 5 m V2	593 kg

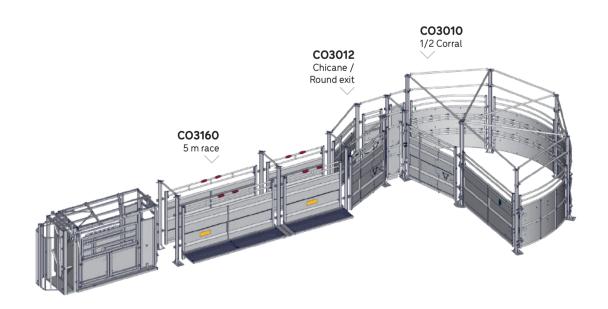


PREMIUM clockwise 1/2 Corral with round exit, sectional gate and fixed 5 m race.


A portion of the 1/2 Corral opens with a **double AUTOLOCK handle.** PATENTED

2 man passage sheeted gates enable the farmer to pass quickly through the restraint handling race.

A sectional gate enables the restraint handling race entrance to be closed to prevent animals from retreating and making it safe for the farmer to cross.

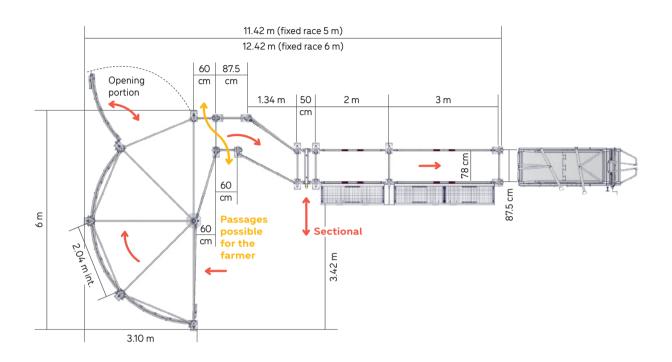


	CO3010	1/2 PREMIUM Corral handling	993.4 kg
	CO3012	Chicane / Round exit for PREMIUM Corral handling	349.4 kg
	CO3132	Sectional gate on platform	103 kg
	CO3160	Fixed race on platform L. 5 m V2	593 kg
2x	CO9931	Contention foot plate post 1P OCTAGONAL 1D L. 2 m on foot plate V2	25.8 kg

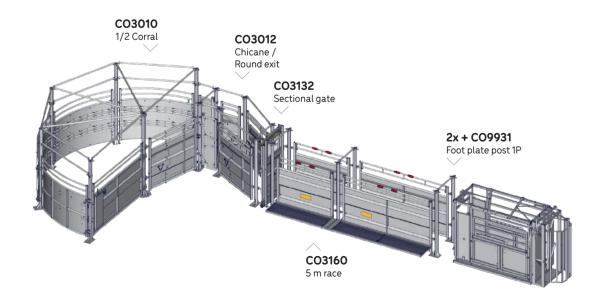


PREMIUM anticlockwise 1/2 Corral with straight exit and fixed 5 m race.

A portion of the 1/2 Corral opens with a **double AUTOLOCK handle**. **PATENTED**

An AUTOLOCK opening barrier and **a sheeted man passage gate** enable the farmer to pass quickly through the restraint handling race.

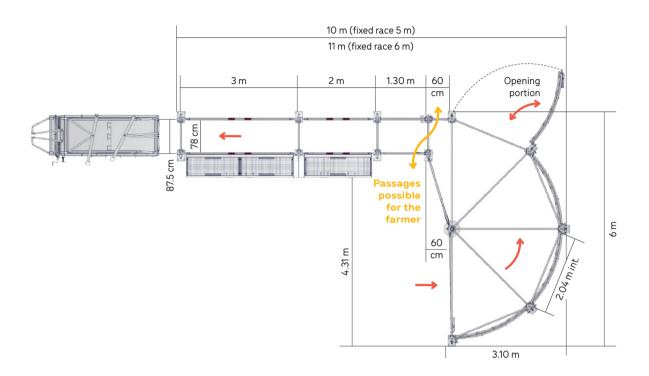

CO3010 1/2 PREMIUM Corral handling	993.4 kg
CO3017 Straight exit 1.30 m for PREMIUM Corral handling	165.8 kg
CO3160 Fixed race on platform L. 5 m V2	593 kg

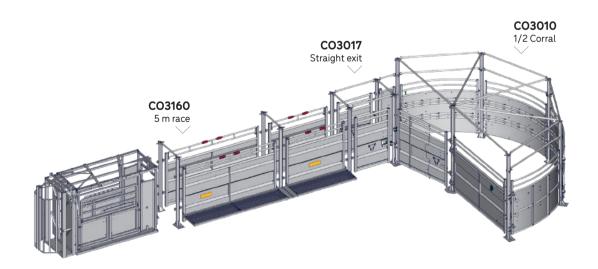


PREMIUM clockwise 1/2 Corral with straight exit and fixed 5 m race.


A portion of the 1/2 Corral opens with a **double AUTOLOCK handle**. **PATENTED**

An AUTOLOCK opening barrier and a sheeted man passage gate enable the farmer to pass quickly through the restraint handling race.

A sectional gate enables the restraint handling race entrance to be closed to prevent animals from retreating and making it safe for the farmer to cross.

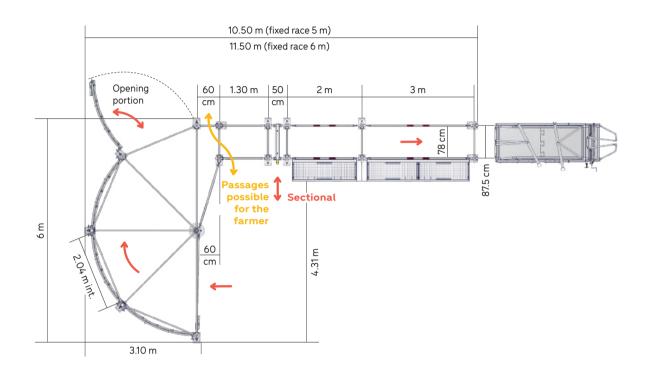

	CO3010	1/2 PREMIUM Corral handling	993.4 kg
	CO3017	Straight exit 1.30 m for PREMIUM Corral handling	165.8 kg
	CO3132	Sectional gate on platform	103 kg
	CO3160	Fixed race on platform L. 5 m V2	593 kg
2x	CO9931	Contention foot plate post 1P OCTAGONAL 1D L. 2 m on foot plate V2	25.8 kg

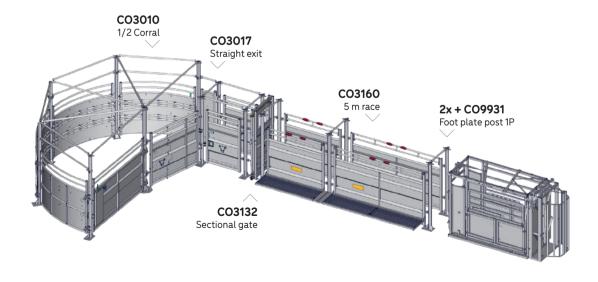


PREMIUM anticlockwise 1/2 Corral with straight exit, sectional gate and fixed 5 m race. A portion of the 1/2 Corral opens with a double AUTOLOCK handle. PATENTED


An AUTOLOCK opening barrier and a sheeted man passage gate enable the farmer to pass quickly through the restraint handling race.

A sectional gate enables the restraint handling race entrance to be closed to prevent animals from retreating and making it safe for the farmer to cross.

A three-way gate with remote control for actuating 2 fixed sheeted barriers with return spring. A safe and simple solution for sorting animals along 3 directions: to left, to right or straight ahead. The posts have welded clevises for fixing exit barriers.

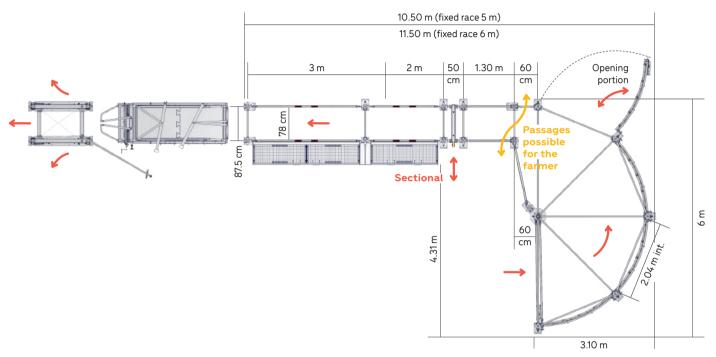

	CO3010	1/2 PREMIUM Corral handling	993.4 kg
	CO3040	Double loop option for 1/2 PREMIUM Corral	135.7 kg
	CO3017	Straight exit 1.30 m for PREMIUM Corral handling	165.8 kg
	CO3132	Sectional gate on platform	103 kg
	CO3160	Fixed race on platform L. 5 m V2	593 kg
2x	CO9931	OCTAGONAL contention foot plate post 1P 1D L. 2 m on foot plate V2	25.8 kg
	CO3050	Sorting gate	307 kg

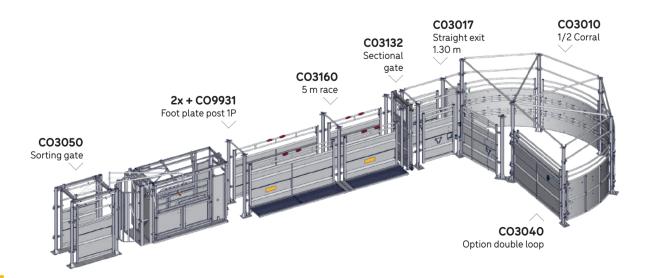


PREMIUM clockwise 1/2 Corral with straight exit and 5.60 m adjustable race.

A portion of the 1/2 Corral opens with a **double AUTOLOCK handle. PATENTED**


An AUTOLOCK opening barrier and a sheeted man passage gate enable the farmer to pass quickly through the restraint handling race.

A sectional gate enables the restraint handling race entrance to be closed to prevent animals from retreating and making it safe for the farmer to cross.


A three-way gate with remote control for actuating 2 fixed sheeted barriers with return spring. A safe and simple solution for sorting animals along 3 directions: to left, to right or straight ahead. The posts have welded clevises for fixing exit barriers.

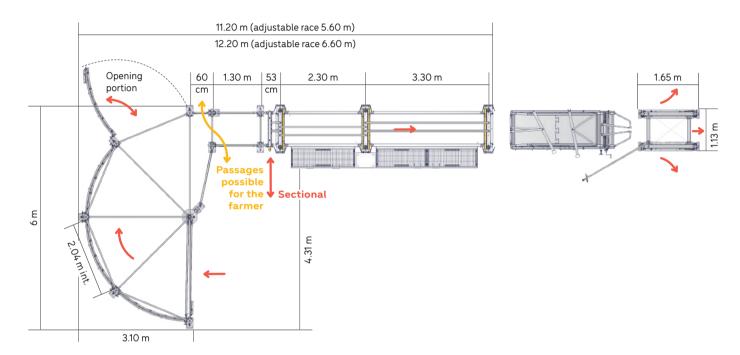

CO3010 PREMIUM 1/2 Corral handling	993.4 kg
CO3040 Double loop option for 1/2 PREMIUM Corral	135.7 kg
CO3017 Straight exit 1.30 m for PREMIUM Corral handling	165.8 kg
CO3132 Sectional gate on platform	103 kg
CO3163 Adjustable restraint handling race L. 5.60 m	1292 kg
CO3050 Sorting gate	307 kg

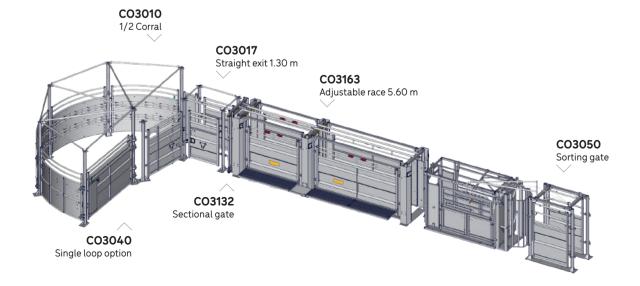

CONTENTION FIXED RACE

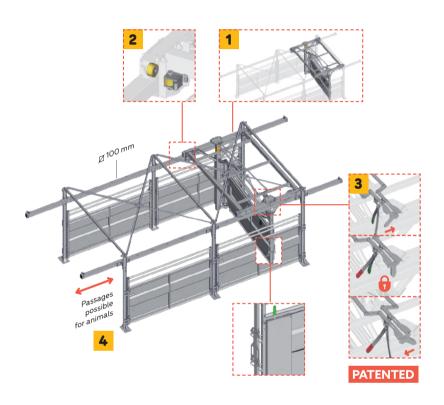


- SUPPORT CART with push barrier on rolling path.

 ☐ 100 mm
- LINEAR GUIDING of cart by 8 rolls.
- 3 SAFETY LOCK automatic. PATENTED
- SECURED DOUBLE OPERATING DIRECTION, animal entry or exit.





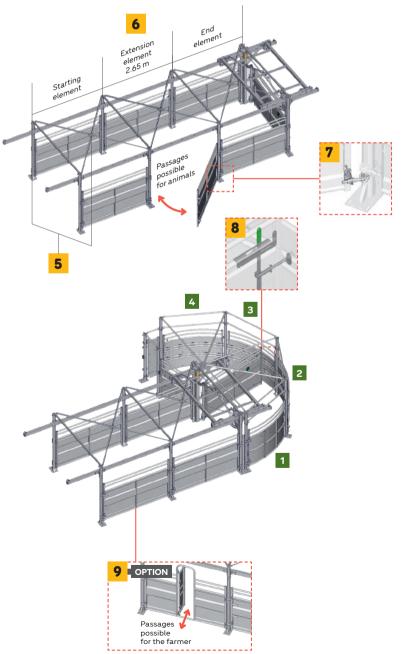

FIGID FRAMEWORK
WITH SQUARING
CROSS AND
OCTAGONAL POST

supporting a fixed sheeted barrier.

- 6 ADDITIONAL EXTENSION ELEMENT length 2.65 m.
- **7 OFFSET JOINT** of panels for outward opening and smaller spacing between panel and post.
- 8 SAFE ROTATION at end of travel, possibility to lock the push barrier in the 1/2 Corral.
- 9 MAN PASSAGE: optional barrier with centre man passage to cross the corridor.

PREMIUM cattle crowd gate 5.30 m long with safety locking in both directions. PATENTED 1/2 Corral for cattle crowd gate, straight exit and 5 m fixed race.

The cattle crowd gate has 4 fixed sheeted barriers, 2 with man passages integrated.


Crush barrier pivoting in the 1/2 Corral with safety locking.

PREMIUM clockwise 1/2 Corral with straight exit.


A portion of the 1/2 Corral opens with a double AUTOLOCK handle. PATENTED

An AUTOLOCK opening barrier and a sheeted man passage gate enable

the farmer to pass quickly through the restraint handling race.

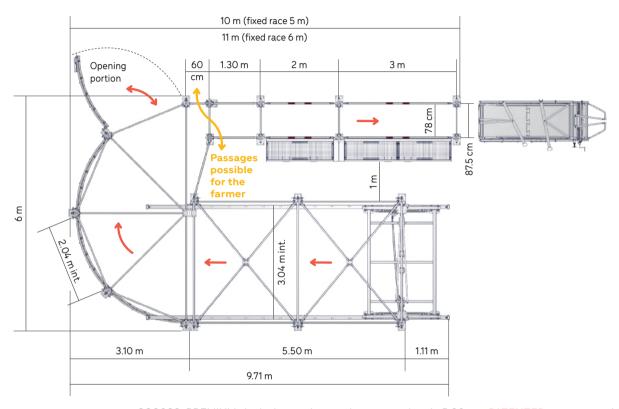

CO3032 PREMIUM clockwise cattle crowd gate complete L. 5.30 m - PATENTED	1,379 kg
CO3015 PREMIUM 1/2 Corral handling for cattle crowd gate	884.9 kg
CO3017 Straight exit 1.30 m for PREMIUM Corral handling	165.8 kg
CO3160 Fixed race on platform L. 5 m V2	593 kg

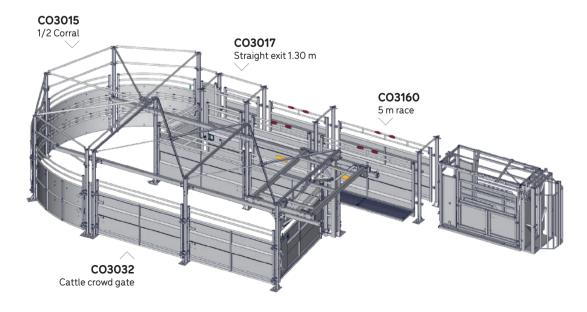

PREMIUM cattle crowd gate 5.30 m long with safety locking in both directions. PATENTED

The cattle crowd gate has 4 fixed sheeted barriers, 2 with man passages integrated.

Crush barrier pivoting in the 1/2 Corral with safety locking.


PREMIUM anticlockwise 1/2 Corral with straight exit.

A portion of the 1/2 Corral opens with a double AUTOLOCK handle. PATENTED


An AUTOLOCK opening barrier and a sheeted man passage gate enable

the farmer to pass guickly through the restraint handling race.

A sectional gate enables the restraint handling race entrance to be closed to prevent animals from retreating and making it safe for the farmer to cross.

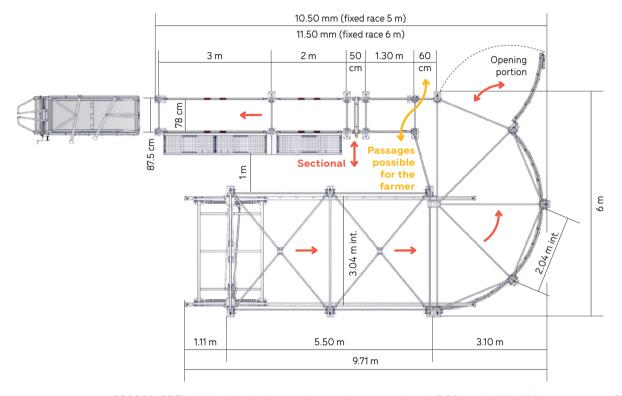

2x	CO9931	OCTAGONAL contention foot plate post 1P 1D L. 2 m on foot plate V2	25.8 kg
	CO3160	Fixed race on platform L. 5 m V2	593 kg
	CO3132	Sectional gate on platform	103 kg
	CO3017	Straight exit 1.30 m for PREMIUM Corral handling	165.8 kg
	CO3015	PREMIUM 1/2 Corral handling for cattle crowd gate	884.9 kg
	CO3031	PREMIUM anticlockwise cattle crowd gate complete L. 5.30 m - PATENTED	1379 kg

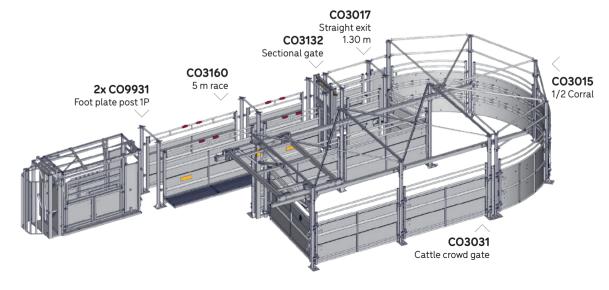

PREMIUM cattle crowd gate 5.30 m long with safety locking in both directions. PATENTED

The cattle crowd gate has 4 fixed sheeted barriers, 2 with man passages integrated.

Crush barrier pivoting in the 1/2 Corral with safety locking.

PREMIUM clockwise 1/2 Corral with straight exit.


A portion of the 1/2 Corral opens with a double AUTOLOCK handle. PATENTED

An AUTOLOCK opening barrier and a sheeted man passage gate enable


the farmer to pass guickly through the restraint handling race.

A sectional gate enables the restraint handling race entrance to be closed to prevent animals from retreating and making it safe for the farmer to cross. A 3-way gate with remote control actuates 2 fixed sheeted barriers with return spring. A safe and simple solution for sorting animals along 3 directions: to left, to right or straight ahead.

The posts have welded clevises for fixing exit barriers.

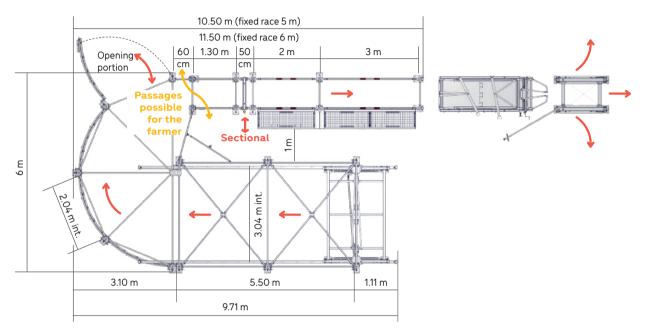

CO3032 PREMIUM clockwise cattle crowd gate complete L. 5.30 m - PATENTED	1379 kg
CO3015 PREMIUM 1/2 Corral handling for cattle crowd gate	884.9 kg
CO3042 PREMIUM double loop option for 1/2 Corral for cattle crowd gate	76.3 kg
CO3017 Straight exit 1.30 m for PREMIUM Corral handling	165.8 kg
CO3132 Sectional gate on platform	103 kg
CO3160 Fixed race on platform L. 5 m V2	593 kg
2x CO9931 OCTAGONAL contention foot plate post 1P 1D L. 2 m on foot plate V2	25.8 kg
CO3050 Sorting gate	307 kg

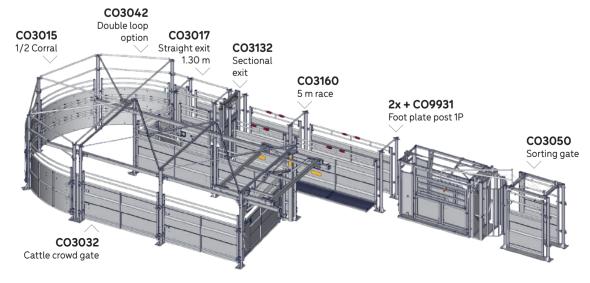


PREMIUM cattle crowd gate 7.95 m long with safety locking in both directions. PATENTED

The cattle crowd gate and its extension have **6 fixed sheeted barriers**, **2 with man passages** integrated. **Crush barrier** pivoting in the 1/2 Corral with safety locking.


PREMIUM anticlockwise 1/2 Corral with straight exit.

A portion of the 1/2 Corral opens with a double AUTOLOCK handle. PATENTED

An AUTOLOCK opening barrier and a sheeted man passage gate enable the farmer to pass quickly through the restraint handling race. A sectional gate enables the restraint handling race entrance to be closed to prevent animals from retreating and making it safe for the farmer to cross.

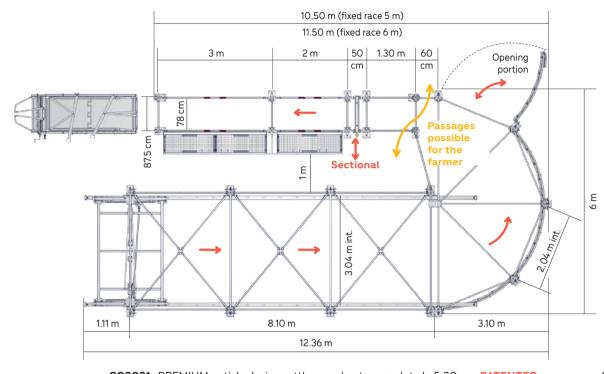

CO3031	PREMIUM anticlockwise cattle crowd gate complete L. 5.30 m - PATENTED	1379 kg
CO3035	5 PREMIUM cattle crowd gate extension complete L. 2.65 m	369.2 kg
CO3015	PREMIUM 1/2 Corral handling for cattle crowd gate	884.9 kg
CO3017	Straight exit 1.30 m for PREMIUM Corral handling	165.8 kg
CO3132	Sectional gate on platform	103 kg
CO3160	Fixed race on platform L. 5 m V2	593 kg
2x CO9931	OCTAGONAL contention foot plate post 1P 1D L. 2 m on foot plate V2	25.8 kg

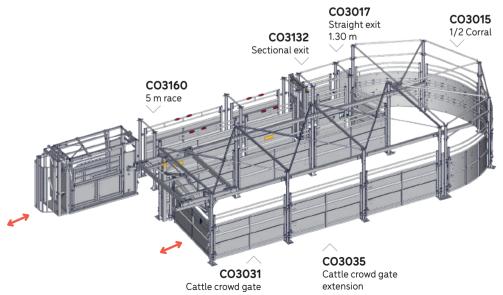



■ 1/2 PREMIUM HANDLING CORRAL ON PLATFORM

The 1/2 Corral handling on platform allows the animals to advance.

It is composed of a pivoting central post held at the top by 5 spacer bars.


A fixed sheeted contention barrier is mounted on a sleeve enabling clockwise and anticlockwise pivoting and locking by catches on the round barrier.

The 1/2 Corral PREMIUM is delivered with a **double AUTOLOCK lever PATENTED** for opening a portion of the 1/2 Corral for access to a loading dock with provision of the "double loop" option. It is installed on a 20 cm thick concrete slab, quality concrete of strength C25/30 MPa, post fixed with 4 dowels M12 L. 160 mm.

CO3010	PREMIUM 1/	'2 Corral h	nandling
--------	------------	-------------	----------

993.4 kg

COMP	OSED O	OF CONTRACTOR OF	
4	A	CO3020 PREMIUM curved Corral barrier	114 kg
1	В	CO3117 Adjustable sheeted contention barrier 1.50 m/2 m V2	77.1 kg
1	Н	CO3025 Fixed sheeted contention barrier L. 2.78 m	98.7 kg
1	K	CO9940 PREMIUM Corral pivoting post	45.1 kg
1	L	CO9948 Contention barrier pivoting kit	13.7 kg
5	9P	CO9942 PREMIUM contention post 9P	30.7 kg
1	10P	CO9943 OCTAGONAL contention post 10P 1D + 1 SURLOCK® L. 2 m on foot plate	26.9 kg
1	J	CO3047 Man passage safety gate L. 60 cm	33.1 kg
1		CO9955 Double AUTOLOCK lever for PREMIUM cattle contention system - PATENTED	13.3 kg
1		CO9980 Set of spacers for PREMIUM 1/2 Corral handling	93.4 kg



CAUTION!

CORROSION

Various solutions are on option to limit zinc loss and corrosion of steel due to prolonged contant with silage, bedding and manure, and we recommend regular maintenance.


Please see our general conditions of use on the Internet site.

Follow the Corral assembly plan.



REMEMBER

The posts for the 1/2 Corral on platform are 2.42 m long with a welded collar to receive the spacer bars.

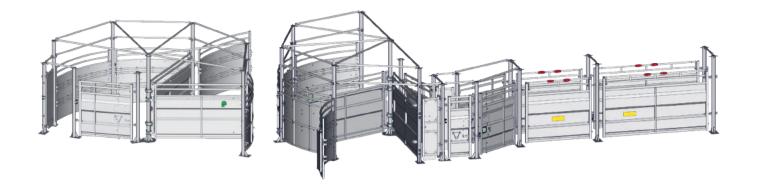


■ DOUBLE LOOP FOR 1/2 CORRAL HANDLING


With a PREMIUM Corral handling installed without cattle crowd gate, a second crush barrier can be added on the pivoting post of the 1/2 Corral.

This barrier is blocked at the post to form a stop, often at portion 3 or 4 of the 1/2 Corral, allowing animals to be brought in or out without passing through the restraint handling race.

The two pivoting barriers of the 1/2 Corral must be rotated together if a restraint handling race is used. In general, the portion of the 1/2 Corral open on to a loading dock.

CO3040 Double loop option for 1/2 PREMIUM Handling Corral		135.7 kg	
COMPOSED OF			
1	1P	CO9931 Contention post 1P	25.8 kg
1	Н	CO3025 Fixed sheeted contention barrier L. 2.78 m	98.7 kg
1	L	CO9948 Contention barrier pivoting kit	13.7 kg
1		SAC607 Bag No. 607 - double loop option for PREMIUM 1/2 Corral	3.27 kg

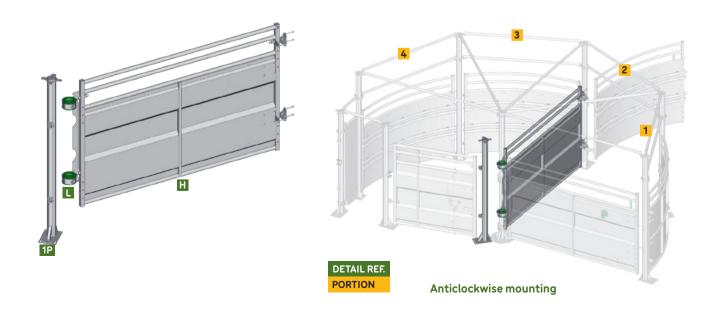

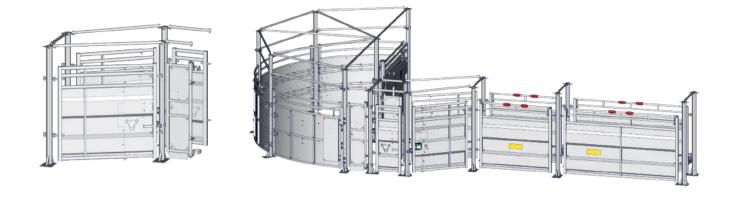


■ ROUND EXIT CONTENTION CHICANE


The round exit chicane is installed after the 1/2 Corral handling without cattle crowd gate.

It allows a curve to be introduced before the restraint handling race. It has a 60 cm sheeted gate man passage and an 88 cm fixed gate for passing quickly and safely from the working area to outside the contention system. The sheeted barrier 1/2 m can close the access to the restraint handling race to bring the animals out on the side.

CO30	CO3012 Chicane / Round exit for PREMIUM handling Corral		349.4 kg
COMPOSED OF			
1	В	CO3117 Adjustable sheeted contention barrier 1.50 m/2 m V2	77.1 kg
1	Ε	CO3122 Fixed sheeted gate L. 88 cm	35.4 kg
2	1P	CO9931 Contention post 1P	25.8 kg
2	2P	CO9932 Contention post 2P	26.7 kg
2		FE3153 Round bracket Ø 102 mm SURLOCK® single SV - PATENTED	2.5 kg
1	J	CO3047 Man passage safety gate L. 60 cm	33.1 kg
1		CO9984 Set of spacers for chicane / round exit	16.3 kg

Anticlockwise mounting

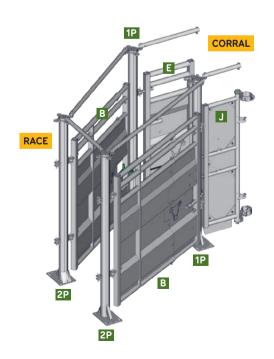

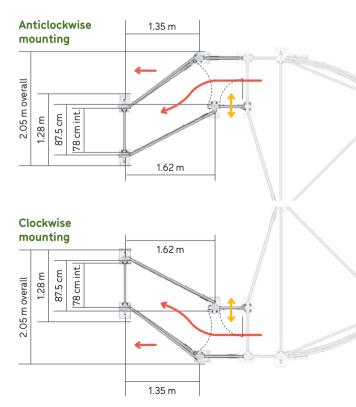



■ STRAIGHT EXIT


The straight exit is installed after the 1/2 Corral handling.

It allows a 1.30 m long exit to be introduced before the restraint handling race. It has a sheeted gate L. 1.30 m and a 60 cm man passage for the 1/2 Corral for passing quickly and safely from the working area to outside the contention system.


A sectional gate is often added at the straight exit before the restraint handling race.

The straight exit can be installed with a 1/2 Corral alone as with a 1/2 Corral for cattle crowd gate.

CO301	CO3017 Straight exit 1.30 m for PREMIUM Handling Corral		165.8 kg
COMPOSED OF			
2	F	CO3123 Fixed sheeted gate L. 1.30 m	50 kg
2	2P	CO9932 Contention post 2P	26.7 kg
1		FE3153 Round bracket Ø 102 mm SURLOCK® single SV - PATENTED	2.5 kg
1		CO9982 Set of spacers for right hand exit L. 1.30 m	9.72 kg

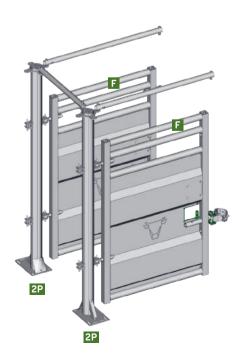


Anticlockwise mounting

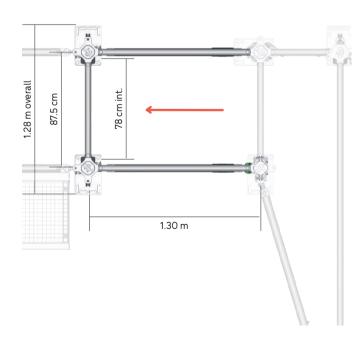



■ FIXED 5 M RACE ON PLATFORM

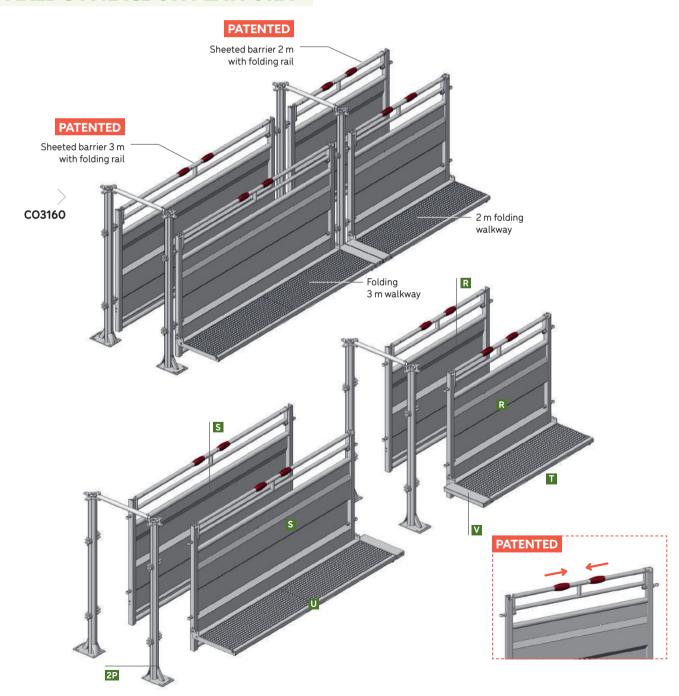

The sheeted race enables animals to be moved safely.

It is to be installed to the desired width. The fixed race is delivered with one side equipped with a walkway.

With the walkway and a folding rail, the farmer has free access above the animals and in safety.

The folding rail is unlocked with a quick movement of two handles towards the interior.

The rail is locked quickly by the two AUTOLOCK bolts. PATENTED

The fixed race on platform is easily installed on a perfectly flat concrete slab.

A quality concrete will withstand the trampling of animals on the platforms. In the area where animals pass, provide a swept finishing concrete to prevent falls. Ground fixing dowels not supplied.

We recommend at least a 20 cm thick slab with strength of C25/30 MPa. Use at least 4 dowels M12 L. 160 mm per post.

USE CONTENTION POSTS. BARE POSTS ON FOOT PLATE WITH BRACKETS ARE UNSUITABLE. IF INSTALLING A RACE WITHOUT A DOUBLE BEND, ORDER 2 EXTRA POSTS.

■ RESTRAINT HANDLING RACE TO CONNECT TO CHICANE

CO3160 Fixed race on platform L. 5 m V2 (connected to the chicane posts)

593 kg **CO**3

CO3161 Fixed race on platform L. 6 m V2 (connected to the chicane posts)

683 kg

COMPOSED OF


- ■2 fixed sheeted barriers with folding rail L. 2 m V2 R
- 2 fixed sheeted barriers with folding rail L. 3 m V2 S
- ■1 folding walkway for sheeted barrier L. 2 m V2 T
- ■1 folding walkway for sheeted barrier L. 3 m V2 U
- 2 walkway extensions **V**
- 4 contention posts 2D OCTAGONAL L. 2 m on foot plate V2 2P
- ■1 set of spacers for fixed race

COMPOSED OF

- 4 fixed sheeted barriers with folding rail L. 3 m V2 S
- 2 folding walkways for sheeted barrier L. 3 m V2 U
- 2 walkway extensions V
- 4 OCTAGONAL contention posts 2D L. 2 m on foot plate V2 2P
- ■1 set of spacers for fixed race


RETAIL PARTS

R	CO3144	Fixed sheeted barrier with folding rail L. 2 m V2	73.5 kg
S	CO3145	Fixed sheeted barrier with folding rail L. 3 m V2	107 kg
T	CO3147	Folding walkway for sheeted barrier L. 2 m V2	43 kg
U	CO3148	Folding walkway for sheeted barrier L. 3 m V2	66 kg
V	CO3129	Extra extension for walkway	5 kg
2P	CO9932	OCTAGONAL contention post 2D L. 2 m on foot plate V2	26.7 kg
	CO9994	Set of spacers for fixed race	4.75 kg
	CO3168	Fixed race extension on platform L. 2 m	258.9 kg
	CO3169	Fixed race extension on platform L. 3 m	348.9 kg

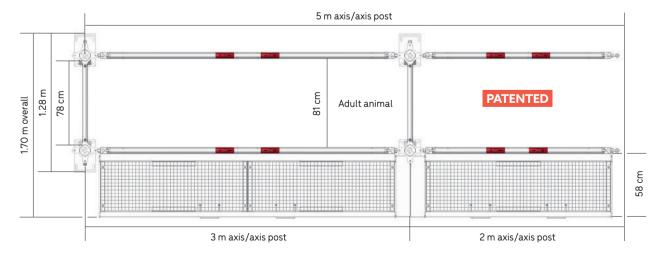

IF INSTALLING 3 WALKWAYS IN SUCCESSION, ORDER 2 EXTRA EXTENSIONS (REF. CO3129).



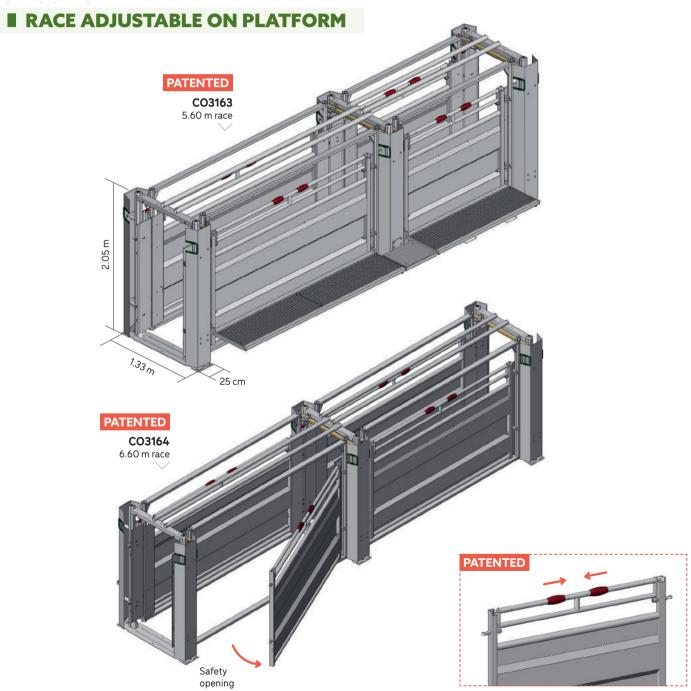

The adjustable sheeted race enables animals to be moved safely.

It is composed of **2 single gates** and **a double gate**. The gates are made with OCTAGONAL tubes Ø 102 mm welded on a wide flat foot plate with 2 non-slip studs. The gates have a rail with castors supporting a frame which itself supports a sheeted barrier with folding rail. **The rails enable quick and simple adjustment** with double locking by pin. If an animal refuses to advance, the sheeted barrier of the race can open for it to come out by the side. The gates are spaced from each other. **The width can be adjusted from 46 to 80 cm**, the space at the posts is filled by a mobile sheeted casing which adapts automatically to adjustments.

For a longer race, simply order a race extension composed of a double post and two sheeted barriers with frames. The adjustable race is **delivered with one side equipped with walkways**. With the folding rail, the farmer can have **clear and safe access above the animals**.


The **folding rail** is unlocked with a quick movement of two handles towards the interior. It is locked just as quickly with **two AUTOLOCK bolts**. The adjustable race is available only on platform and **is installed on a perfectly flat concrete slab**. A quality concrete will withstand the trampling of animals on the platforms. In the area where animals pass, provide a swept finishing concrete to prevent falls. Ground fixing dowels not supplied. We recommend at least a 20 cm thick slab with strength of C25/30 MPa. Use at least 4 dowels M12 L. 160 mm per post.

THE DIMANSIONS ARE GIVEN FOR INFORMATION PURPOSES, SEE THE LAYOUT DRAWING. NB TAKE INTO ACCOUNT THE HEIGHT AND WIDTH OF THE RACE TO ALLOW FOR THE POSSIBILITY OF OPEN ING THE SHEETED BARRIER SIDEWAYS. THE RACE IS DESIGNED ONLY FOR FIXED SHEETED BARRIERS WITH FOLDING RAIL.


RESTRAINT HANDLING RACE TO CONNECT TO CHICANE

CO3163 Fixed race on platform L. 5.60 m (5.85 m overall)	1,292 kg
CO3164 Fixed race on platform L. 6.60 m (6.85 m overall)	1,388 kg
OPTION	
CO3166 Adjustable race on platform L. 2.30 m	541.5 kg
CO3167 Adjustable race on platform L. 3.30 m	659.5 kg
CO3149 Extra walkway extension for adjustable race	16.5 kg
CO3170 Complete single contention post	149.5 kg

	CO3163	CO3164	CO3163 + CO3166	CO3163 + CO3167	CO3164 + CO3166	CO3164 + CO3167
Α	5.60 m	6.85 m	8.15 m	9.15 m	9.15 m	10.15 m

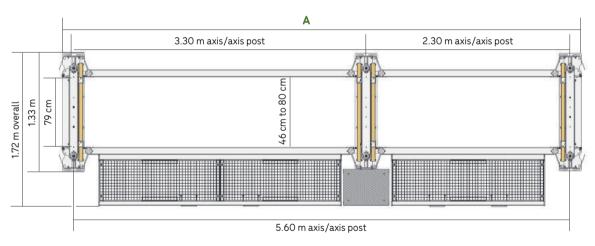

ADJUSTMENT IN STEPS OF 5.5 CM.

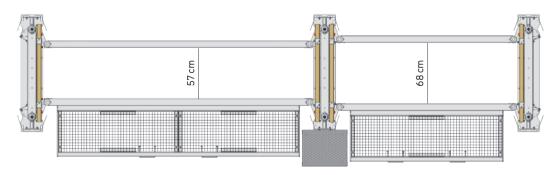

■ ADJUSTABLE SHEETED CONTENTION BARRIER

The contention barrier is adjustable by 50 cm.


It is composed of a 1 m, 1.50 m or 2 m rear sheet, combined with a front sheet allowing a choice of panel or AUTOLOCK door. The front part has two cut-outs in the panel to fit a door,

if necessary cut out the hand passage and fit the plastic protection.

When mounting, according to the length when mounted, the sheet must be drilled from the front to fit the screws holding the sheets between the front and the rear. The 1.58 m high sheeted barrier has a sheeted part 1.25 m high. Barrier lengths are the OCTAGONAL contention post axis/axis dimensions \emptyset 102 mm.

B CO3117	Adjustable sheeted contention barrier 1.50 m/2 m V2	83 kg
C CO3118	Adjustable sheeted contention barrier 2 m/2.50 m V2	100 kg
D CO3119	Adjustable sheeted contention barrier 2.50 m/3 m V2	117 kg



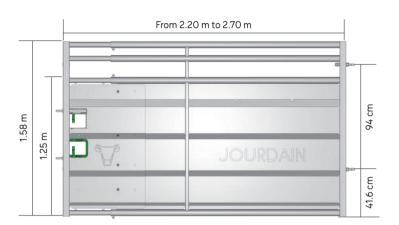

■ SHEETED FIXED CONTENTION GATE


Enables a choice of panel or fixed AUTOLOCK gate.

The 1.58 m high metal barrier has a sheeted part 1.25 m high. It has two cut-outs in the panel to fit a door, if necessary cut out the hand passage and fit the plastic protection.

Sheeted gate lengths are the fixed OCTAGONAL contention post axis/axis dimensions \emptyset 102 mm.

 E CO3122 Fixed sheeted gate L. 0.88 m V2
 35.4 kg

 F CO3123 Fixed sheeted gate L. 1.30 m V2
 50 kg

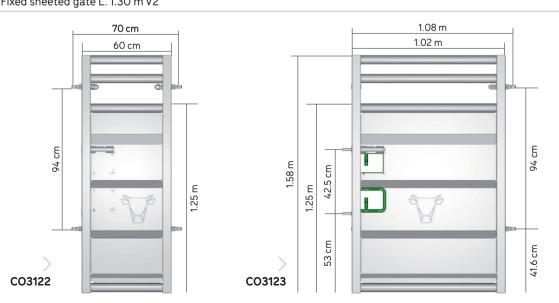



■ SHEETED BARRIER WITH FOLDING RAIL

Fixed sheeted barriers with folding rail are not adjustable.

They are used for restraint handling races with a folding rail on the top part.

They give the farmer clear and safe access above the animals.

The folding rail is unlocked with a quick movement of two handles towards the interior.


It is locked just as quickly with **two AUTOLOCK bolts**. Fixed sheeted barriers with folding


rail are provided to be equipped with a folding walkway **on option**. The 1.58 m high sheeted barrier has a sheeted part 1.25 m high. The lengths are the fixed OCTAGONAL contention post dimensions \emptyset 102 mm.

R CO3144 Fixed sheeted barrier with folding rail L. 2 m V2

S CO3145 Fixed sheeted barrier with folding rail L. 3 m V2

107 kg

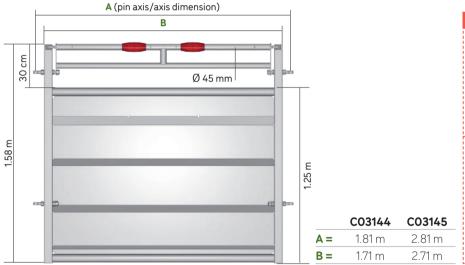



■ WALKWAY

Walkways are retractable and robust.

They are mounted only on fixed sheeted barriers with folding rail. The walkway is composed of a robust metal frame with galvanized metal slats allowing soil to pass through.

The walkway gives safe access above the animals. It is supported by the barrier.

A fixed or adjustable walkway extension must be provided between two walkways to avoid gaps between the two walkways.

CO3147 Folding walkway for sheeted barrier L. 2 m V2	43 kg
CO3148 Folding walkway for sheeted barrier L. 3 m V2	66 kg
▼ CO3129 Extra walkway extension for fixed race	5 kg
CO3149 Extra walkway extension for adjustable race	16.5 kg

■ FIXED SHEETED CONTENTION BARRIER

The fixed sheeted contention barrier is constructed with 50 mm square section and is sheeted to a height of 1.25 m.


It can be mounted between posts Ø 102 mm with 4 eyebolts or opening with 2 AUTOLOCK bolts.

Ther 1.70 m and 2.78 m versions are delivered with 4 eyebolts and 2 AUTOLOCK bolts.

The 2.78 m integrated man passage version is only mounted non-opening between 2 posts of Ø 102 mm.

This barrier is used only to make restraint races.

G CO3045 Fixed sheeted contention barrier L. 1.70 m	62 kg
H CO3025 Fixed sheeted contention barrier L. 2.78 m	98.7 kg
CO3027 Fixed sheeted contention barrier L. 2.78 m man passage	121.4 kg

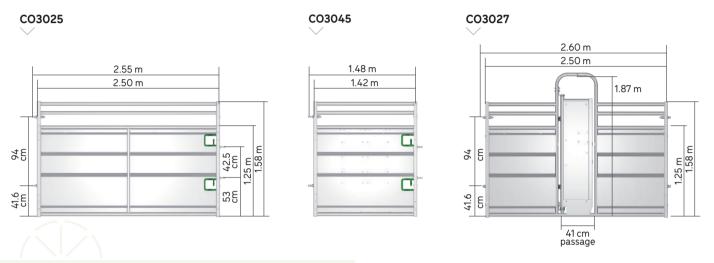


■ CURVED CONTENTION BARRIER

The sheeted 1/2 Corral curved barrier is delivered with 4 offset hinges reducing the play between the square section and the OCTAGONAL post. It can only be opened outwards from the 1/2 Corral.

It has 2 safety latch systems (invertable according to mounting) enabling the 1/2 Corral pivoting barrier to be locked.

A CO3020 PREMIUM curved Corral barrier

116.5 kg






■ DOUBLE AUTOLOCK CONTENTION LEVER OPTION

The double AUTOLOCK lever opens the AUTOLOCK bolts in a single movement while maintaining the use of the slam latch with the SURLOCK® bracket.

The 1/2 Corral PREMIUM is delivered as standard with a curved opening portion equipped with a double AUTOLOCK lever. The double AUTOLOCK lever for PREMIUM contention with barriers L.1.70m **CO3045**, L.2.78m **CO3025** and curved **CO3020**. It can be purchased retail and is delivered complete with handle, springs, AUTOLOCK pins and sheet metal housing.

CO9955 The double AUTOLOCK lever for PREMIUM contention - PATENTED

13.3 kg

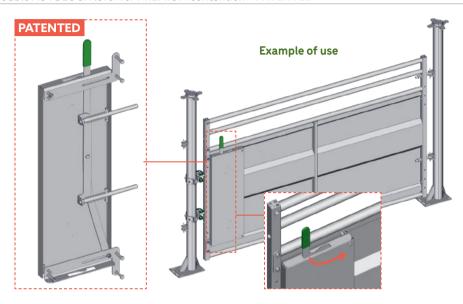

■ CONTENTION MAN PASSAGE GATE L. 60 CM


The man passage gate used in the PREMIUM contention range is fixed by bracket on the OCTAGONAL post.


It is sheeted over its entire height and is held closed by a drawback spring. It is fitted between 2 OCTAGONAL posts 60 cm apart and offers a 41 cm passage. It opens inwards to the race and has 2 rubber stops to prevent animals from coming out. It must be fitted in the flow race so that the pressure of the animals pushes the gate to the stop but does not allow it to open.

J CO3047 Contention man passage gate L. 60 cm

33.1 kg








Example of use





■ POST ON CONTENTION PLATFORM

The OCTAGONAL posts on the contention platform are of lengths 2 m and 2.42 m.

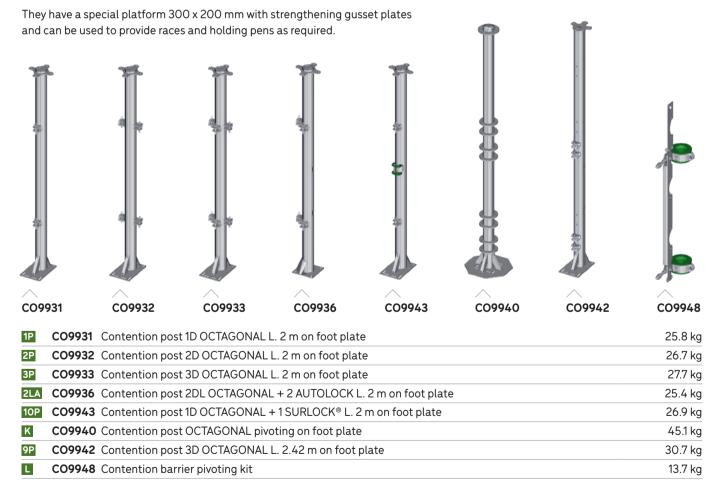

CORROSION

Various solutions are on option to limit zinc loss and corrosion of steel due to prolonged contant with silage, bedding and manure, and we recommend regular maintenance.

Please see our general conditions of use on the Internet site.


■ SLIDING SECTIONAL GATE

The sectional gate quickly stops and closes a restraint handling race particularly at a Corral exit, in the middle or at the end of a restraint handling race.

It can also be placed at certain man passages for operators to move safely.

CO3132 Sectional gate on platform

102.9 kg

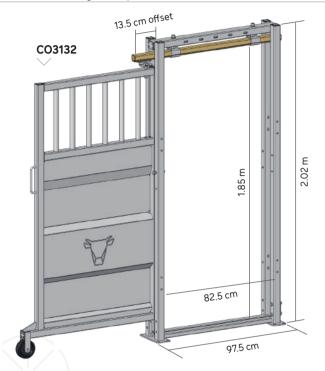






SORTING GATE

The sorting gate on platform has 2 fixed cord-operated sheeted gates enabling animals to be sent to the left or the right.

The barriers are returned to the closed position by drawback spring. When the barriers are closed, the animals go straight on out. The OCTAGONAL posts have welded clevises for fixing exit barriers.

CO3050 Sorting gate on platform

307 kg

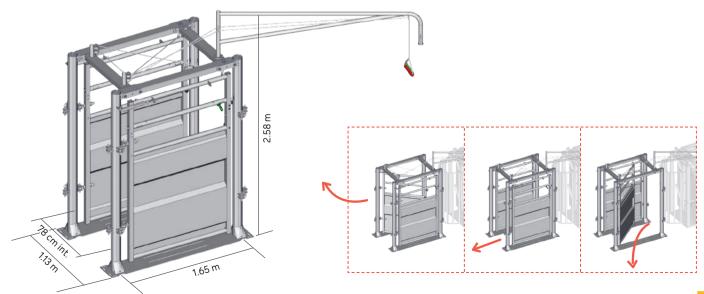




■ PREMIUM CATTLE CROWD GATE

The 5.30 m long PREMIUM cattle crowd gate is delivered with its supporting pushing trolley, equipped with automatic locking every 40 cm in both directions. PATENTED

Delivered with 6 OCTAGONAL posts with alignment cross, rolling track, a crush barrier, 2 fixed barriers L. 2.78 m and 2 barriers L. 2.78 m with integrated man passage and 4 fixed barriers L. 2.78 m.

MAKE SURE TO CHOOSE THE RACE YOU NEED, IN CLOCKWISE OR ANTICLOCKWISE VERSION.

CO3031 Anticlockwise cattle crowd gate PREMIUM L. 5.30 m - PATENTED	1,378.9 kg
CO3032 Clockwise cattle crowd gate PREMIUM L. 5.30 m - PATENTED	1,378.9 kg

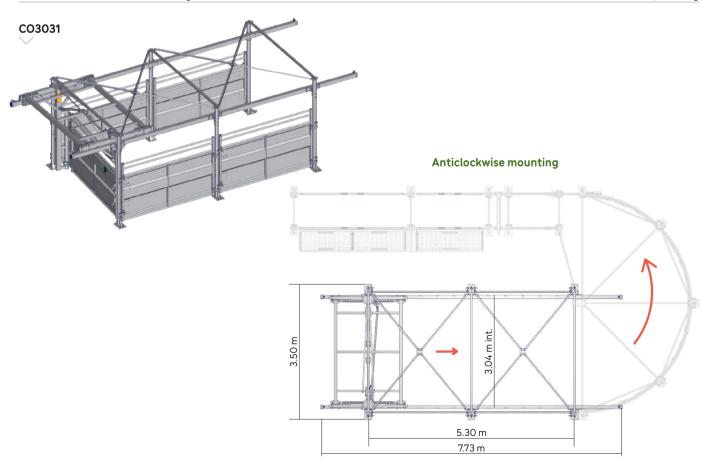


■ PREMIUM CATTLE CROWD GATE EXTENSION


Extension piece for cattle crowd gate to lengthen the race by 2.65 m.

It is delivered with 2 OCTAGONAL posts with alignment cross, rolling track and 2 fixed sheeted barriers L. 2.78 m.


CO3035 Cattle crowd gate extension PREMIUM L. 2.65 m

369.2 kg

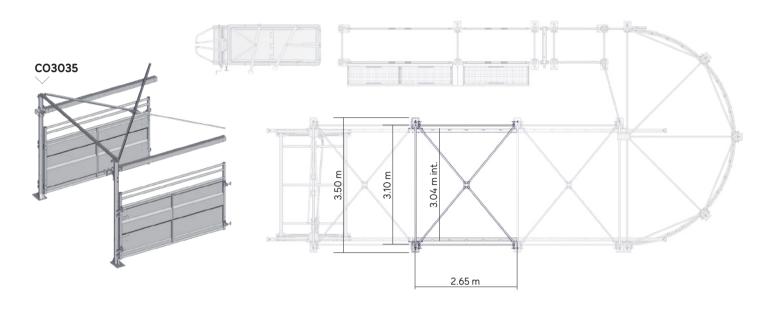

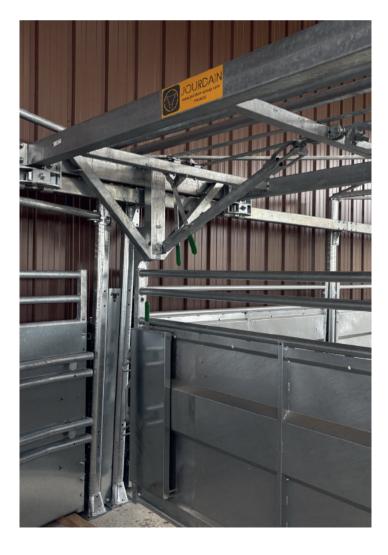



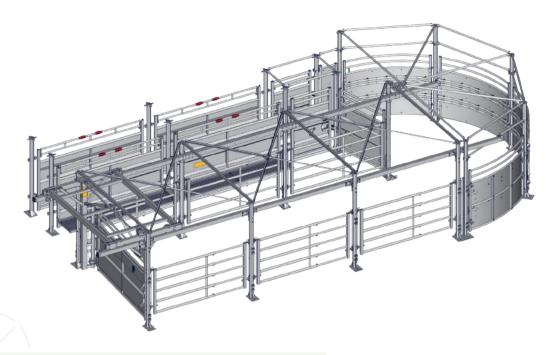

■ PREMIUM BARE CATTLE CROWD GATE

The 5.30 m long PREMIUM BARE cattle crowd gate is delivered with its supporting pushing trolley, equipped with automatic locking every 40 cm in both directions. PATENTED


Delivered with 6 OCTAGONAL posts with four-way cross, a guide rail and a crush barrier. The single clevises and anti-passage pins can be used for fitting EX 5 **BA2001** panels or adjustable panelled contention barriers 2.50 m / 3 m **CO3119**.

MAKE SURE TO CHOOSE THE COLOUR YOU NEED, IN CLOCKWISE OR ANTICLOCKWISE VERSION.

CO3036 Anticlockwise cattle crowd gate extension PREMIUM L. 5.30 m - PATENTED

1,000.5 kg
CO3037 Clockwise cattle crowd gate extension PREMIUM L. 5.30 m - PATENTED

1,000.5 kg

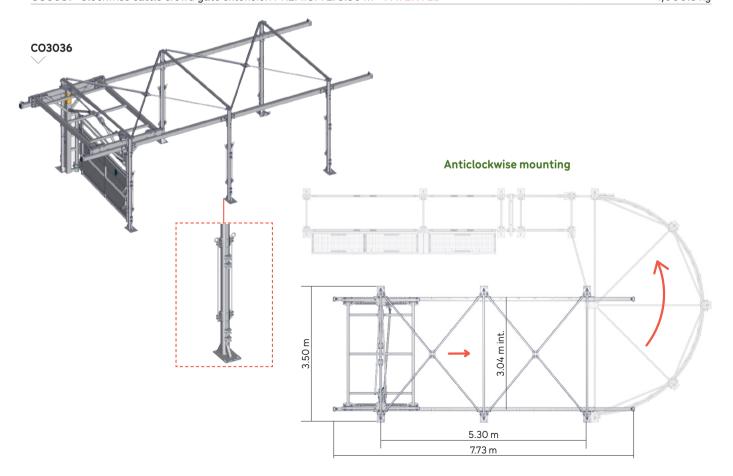


■ PREMIUM BARE CATTLE CROWD GATE EXTENSION


Extension piece for cattle crowd gate to lengthen the race by 2.65 m.

It is delivered with 2 OCTAGONAL posts with four-way cross and guide rail. The single clevises and anti-passage pins can be used for fitting EX 5 **BA2001** panels or adjustable panelled contention barriers 2.50 m / 3 m **CO3119**.

CO3039 Cattle crowd gate extension BARE PREMIUM L. 2.65 m

176.6 kg

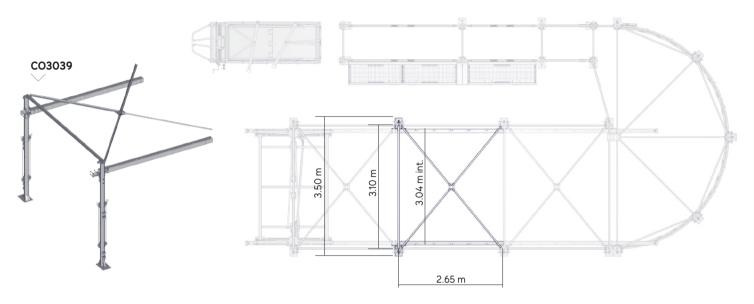

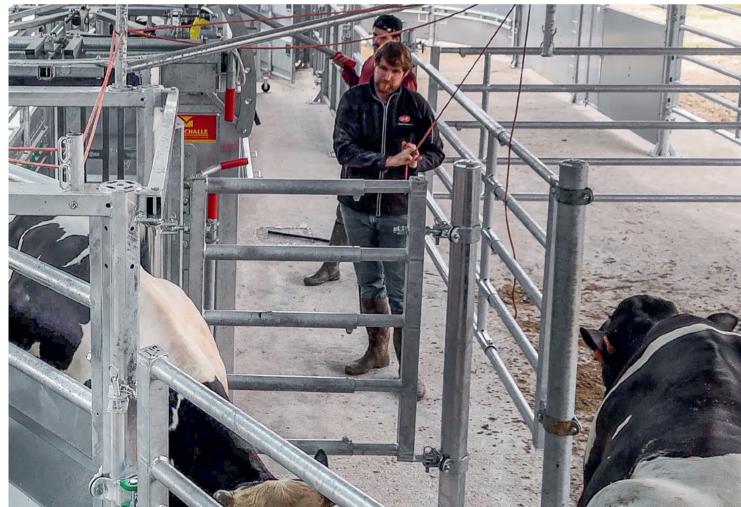

■ 1/2 CORRAL FOR CATTLE CROWD GATE

1/2 PREMIUM Corral handling special for cattle crowd gate, delivered with 4 curved barrriers, a tub exit barrier and a sheeted man passage gate. It has no central post. The pivoting post is delivered on the cattle crowd gate.

It is delivered with a double AUTOLOCK lever PATENTED for opening a portion of the 1/2 Corral for access, such as to a loading dock.

It is installed on a 20 m thick concrete slab, concrete of strength C25/30 MPa, post fixed with 4 dowels M12 L. 160 mm.

CO3015 PREMIUM 1/2 Corral handling for cattle crowd gate

884.9 kg




■ DOUBLE LOOP FOR CATTLE CROWD GATE

With the double loop option for cattle crowd gate, a flap type barrier placed at the race exit can be provided.

When folded out, it forms a stop to guide the animals to the exit created by opening the curved barrier of the 1/2 Corral for portions 3 or 4.

CO3042 Double loop option for cattle crowd gate

76.3 kg

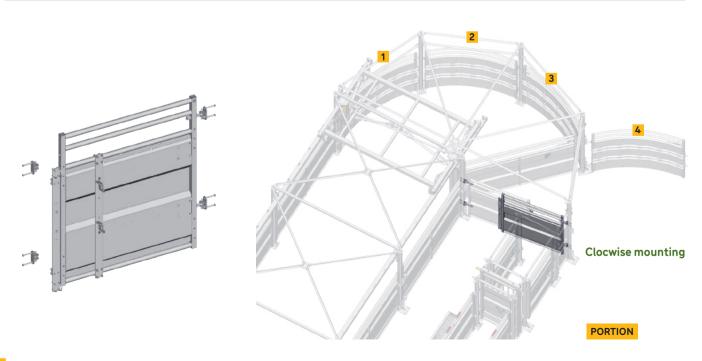


■ MARÉCHALLE PESAGE RANGE







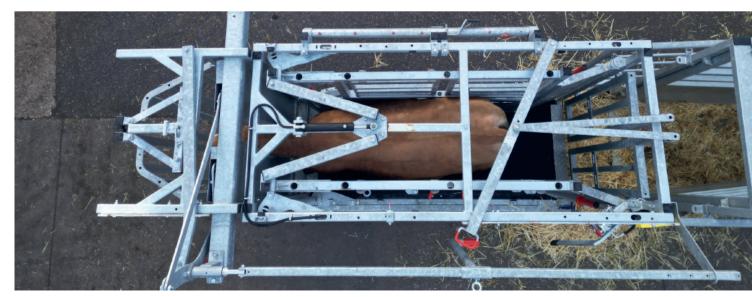





JOURDAIN, A COMPANY WITH A WORLDWIDE REPUTATION

Our company's aim is to meet all of our clients' requirements by offering high quality products and service to our network of dealers and to livestock producers.

Innovation and the renewal of our product range are essential for JOURDAIN'S development both at national and international level.

As a company we constantly review ourselves at all levels: conception, manufacture, commercialisation, the dispatch of our products, all with the help of the 220 members of our workforce who guarantee high-quality French manufacturing.

Our growing presence on the export front confirms our worldwide reputation.

JOURDAIN is renowned for its capacity for innovation and the quality and strength of its products. It is essential that we maintain these high standards.

Dominique and Didier Jourdain



JOURDAIN A STORY IN ITSELF



DELVE INTO THE HEART OF JOURDAIN'S OPERATIONS














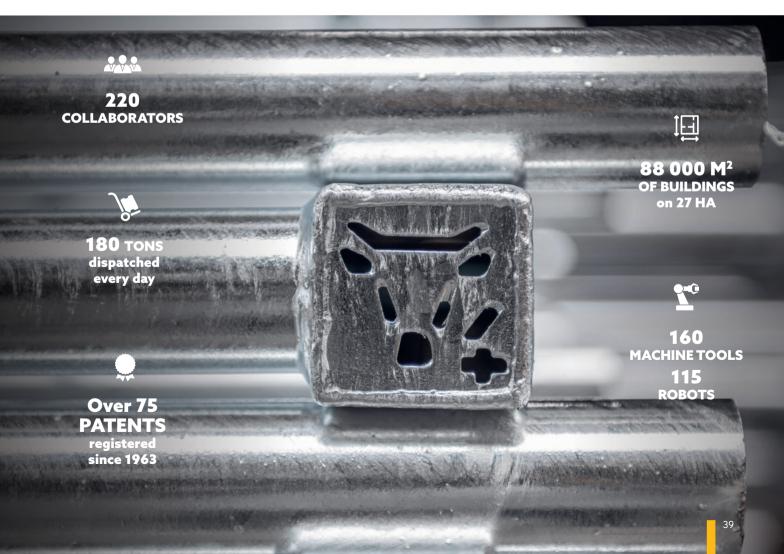



THE JOURDAIN RANGE OVER **850** PRODUCTS

All our catalogues and general terms and conditions are available for viewing and downloading on our website



















Your dealer:

ZI de Violaine - 45300 Escrennes - FRANCE Tel. +33 (0)2 38 34 00 00





